


PM2.5/PM10 Particulate Matter Transmitter/Controller

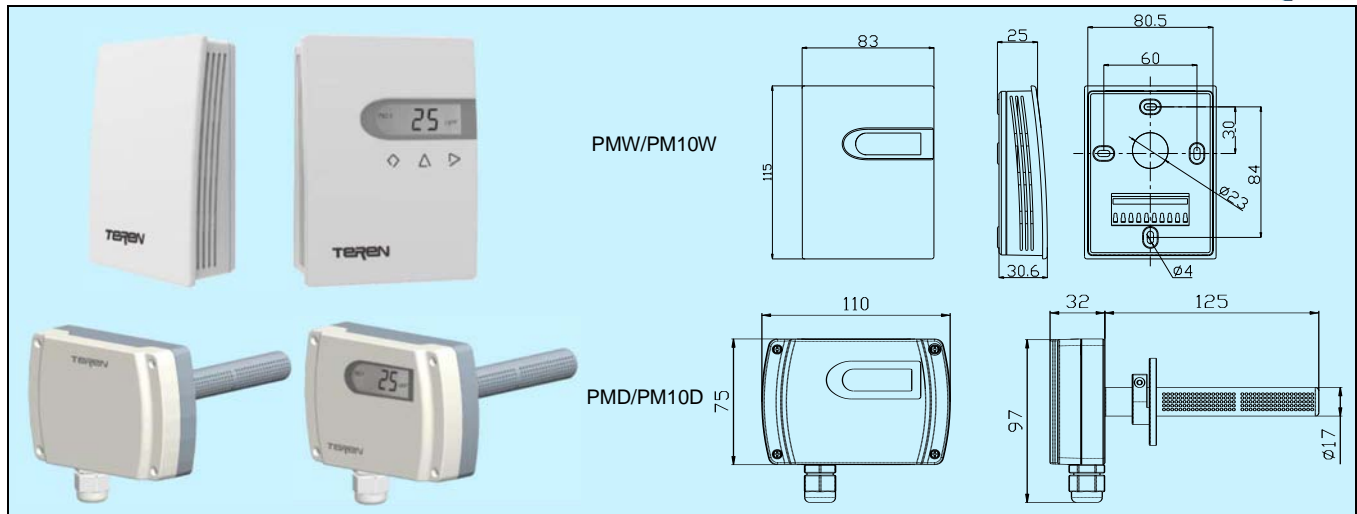

Applications & Features

- PM series are designed for monitoring & controlling environment air quality (particulate matter PM2.5 & PM10)
- PMW/PM10W is suitable for wall mount and PMD/PM10D is suitable for duct mount
- The sensor has very good long-term stability, consistency accuracy is up to +/-10% readings or +/-10 ug/m³, with real-time response and support continuous acquisition
- MBTF is more than 3 years for continuous service (service life can be up to 8-10 years in typical stable concentration change working conditions and auto(intermittent) work mode), free maintenance
- All electrical terminals are on the inside bottom, avoid any possible destroy to PCB when wiring (for PMW/PM10W)
- Digital technology applied, over voltage and reverse polarity protection, high reliability and anti-interference capability
- LCD & touch function keys selectable
- Optional relay output, can set various parameters and functions with LCD and keys, support all alarm or control mode, so it can be a stand alone controller (for PMW)

Specifications

Sensor: Laser particulate matter sensor, detected particle size 0.3~10 um (PM2.5 & PM10)

Service Life: MBTF more than 3 years in continuous service mode, service life up to 8-10 years in auto (intermittent) service mode

Sampling Method: Laser scattering principle

Range: 0~500ug/m³ (measuring range >1000ug/m³)

Accuracy: +/-10 ug/m³ @0~100ug/m³, +/-10% reading@100~500ug/m³ @25°C/50%RH, see accuracy curve

Resolution: 1 ug/m³

Response time: in continuous service mode, sample time < 1s, response time < 10s

Output: 4~20mA, 0~10V, RS485/Modbus

Relay: 1 × SPST, 3A-30VDC/250VAC(PMW/PM10W)

Power supply: 16~28VAC/16~35VDC

Load resistance: ≤500Ω (Current output), ≥2kΩ (Voltage output)

Display: Optional LCD for all models

Keys: Optional for PMW or PM10W only

Working environment: 0~50°C, 0~95%RH (Non-cond.)

Storage temperature: -30~70°C


Housing: fire retardant PC(UL94V-0)(PMW/PM10W), fire retardant ABS+PC(UL94V-0)(PMD/PM10D)

Protection: IP30 (PMW/PM10W), IP65 (PMD/PM10D)

Weight: 200g (PMW/PM10W), 270g (PMD/PM10D)

Approval: CE

Typical consistency accuracy curve:

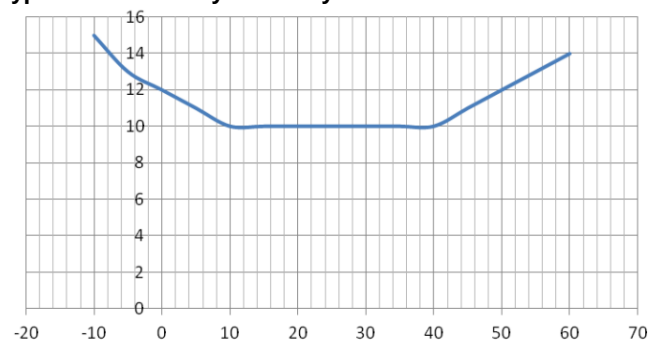

Models

Model	PMW PMD PM10W PM10D			Room Transmitter (PM2.5) Duct mount Transmitter (PM2.5) Room Transmitter (PM10) Duct mount Transmitter(PM10)
Output		1 B		4~20mA&0~10VDC 4~20mA&0~10VDC, RS485/Modbus
Relay		0 1		N/A 1×SPST
LCD/Key		0 1 2		N/A LCD LCD, with backlight, touch keys